



ACCESSORIES • Valleys


- **IKO Armourvalley®**

is a high quality APP modified roll finished with ceramic-coated granules that perfectly match the colours of IKO shingles. The special features make it ideal for the specific needs of roof valleys: strength, flexibility and aesthetics. It can also be used for low slope roof areas adjacent to shingles.

- **IKO Base®**

is a underlay for IKO Armourvalley, when used on low slope roof areas (<15°) this roll must be applied with a good mechanical fastening (nail or screws every 20 cm in all directions). Afterwards the IKO Armourvalley must be fully torched on it.

	Armourvalley®	Base®
Weight/roll	38,8 kg	25,9 kg
Thickness	4 mm	2,1 mm
Dimensions (length x width)	7,5 m x 1 m	12 m x 1 m
Surface	7,5 m ²	12 m ²
Rolls/pallet	25	24
Tensile strength (longitudinal)* (EN 12311-1)	650 N/50 mm	550 N/50 mm
Tensile strength (transversal)* (EN 12311-1)	400 N/50 mm	400 N/50 mm
Elongation (longitudinal)* (EN 12311-1)	20 %	20 %
Elongation (transversal)* (EN 12311-1)	20 %	20 %
Heat resistance lower surface (EN 1110)	120 °C	120 °C
Cold flex lower surface (EN 1109)	-8 °C	-15 °C

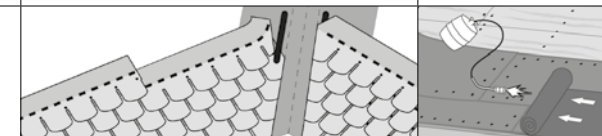

(* Registered average values)



IKO Sales International NV
 Truibroek 74 • 3945 Ham • Belgium
 T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30
 E residential.europe@iko.com • www.iko.be

